

The evolution of track 48V Ultra-thin magnetic light that aims to simplify installation and use but also to widen the market potentialities of this product range, while maintaining technical and system features.



Content



UT25-Ultrason 01



UT25-Cyclops 03



UT25-Spiders 05



UT25-Ultrason 07



UT25-Cyclops 09



UT25-Spiders 11



UT25-Agusta 15




UT25-Agusta 17




UT25-Agusta 19



UT25-Hydra 21




UT25-Pista 23




UT25-Marlboro 24




UT25-Lamp module 25



UT25-Lamp module 27



UT25-Track Rail 29

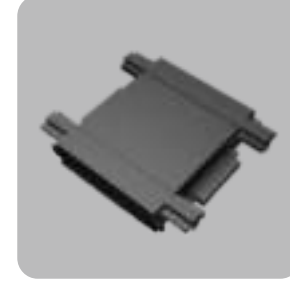

Track connections 33



UT25 Track rail-2 34




UT25-Connexion Module 35



UT25-Power Supply 36

UT25-Ultron

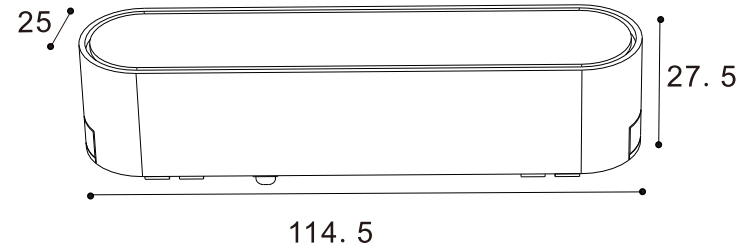

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-FLR6	6W	Ra90	40-48V	478lm	114.5x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle




120°

Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.



UT25-Cyclops

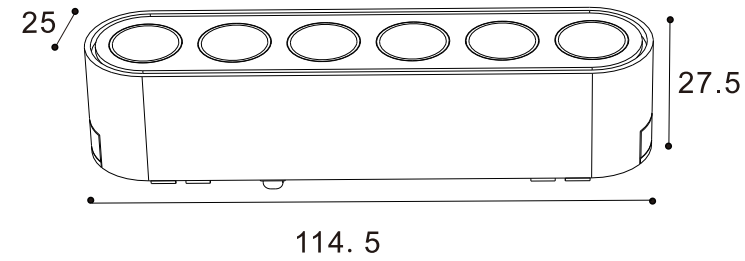

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-GLR6	6W	Ra90	40-48V	508lm	114.5x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle




36°

Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.



UT25-Spiders

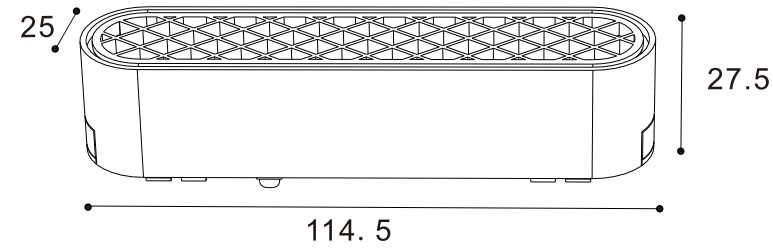

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-AGR6	6W	Ra90	40-48V	279lm	114.5x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle




60°

Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.



UT25-Ultron

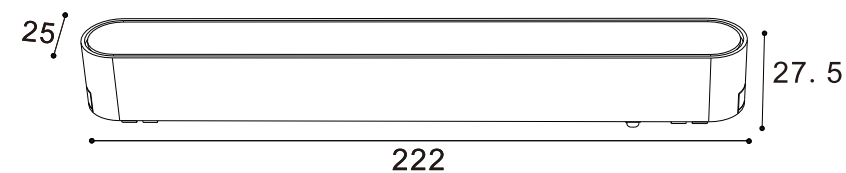

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-FLR12	12W	Ra90	40-48V	1054lm	222x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle




120°

Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.



UT25-Cyclops

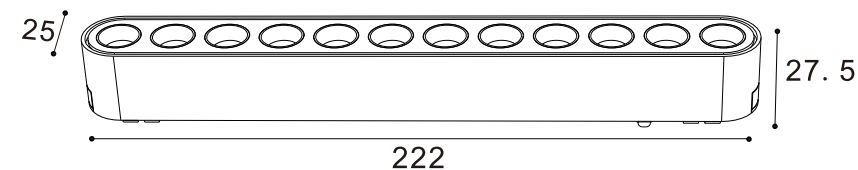

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-GLR12	12W	Ra90	40-48V	1068lm	222x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle





24°

Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Spiders

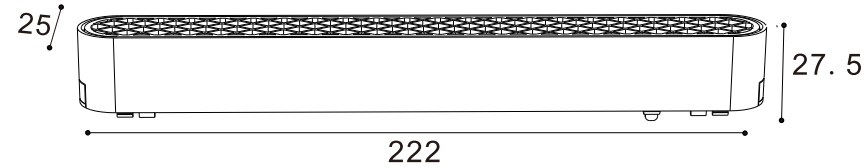

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-AGR12	12W	Ra90	40-48V	400lm	222x27.5x25	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle




Notes:
 *For other options special request, please contact us.
 For the most updated product information, please go to our website.






UT25-Agusta

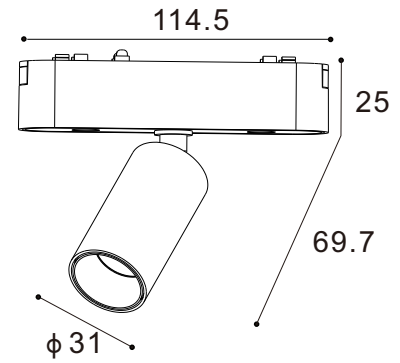

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-SL-5W	5W	Ra90	40-48V	380lm	Φ31x94.7x114.5	■ BK □ WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

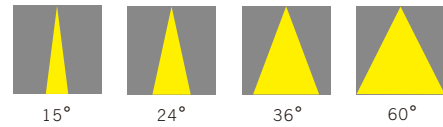


Notes:

*For other options special request, please contact us.
For the most updated product information, please go to our website.




UT25-Agusta

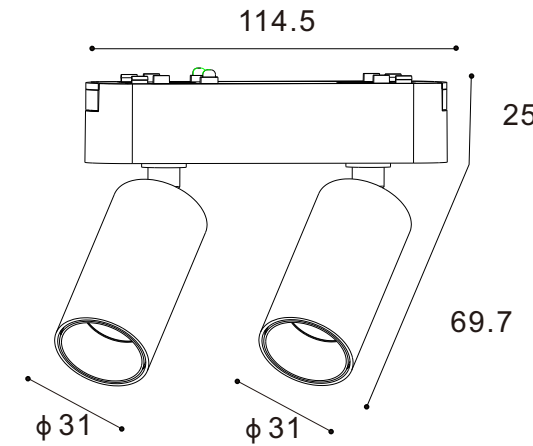

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	表面处理 Finish	色温 CCT	系统选配 System Options
Ut25-SL-5W*2	5W*2	Ra90	40-48V	380lm*2	Φ31x94.7x114.5	■ BK □ WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

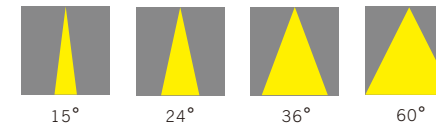


Notes:

*For other options special request, please contact us.
For the most updated product information, please go to our website.




UT25-Agusta

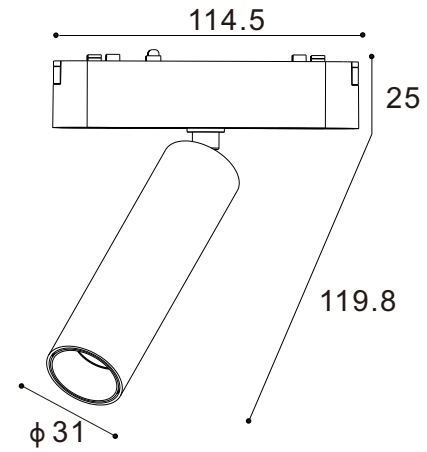

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
Ut25-SL-7W	7W	Ra90	40-48V	560lm	Φ31x144.8x114.5	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

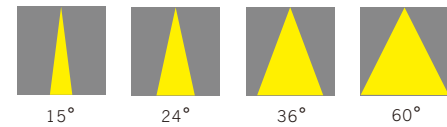


Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Agusta

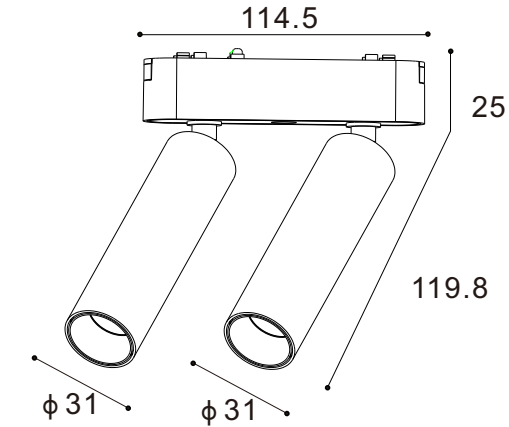

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	色温 CCT	System Options
Ut25-SL-7W*2	7W*2	Ra90	40-48V	560lm*2	Φ31x144.8x114.5	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

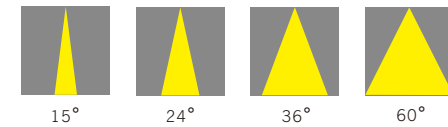


Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Agusta

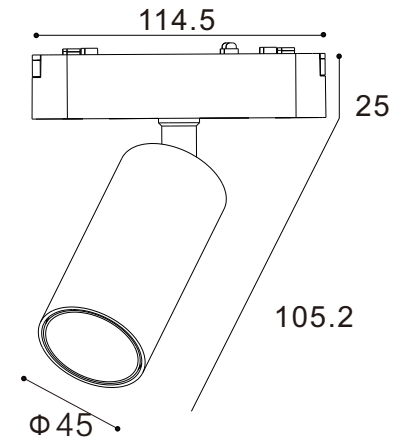

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	色温 CCT	System Options
Ut25-SL-12W	12W	Ra90	40-48V	960lm	Φ45x130.2x114.5	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

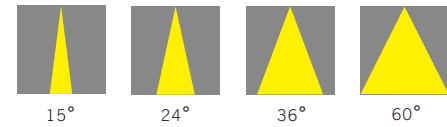


Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Agusta

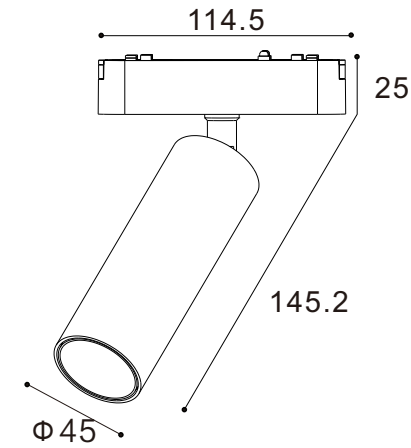

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	色温 CCT	System Options
UT25-SL-15W	15W	Ra90	40-48V	1280lm	Φ45x170.2x114.5	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

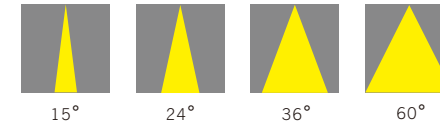


Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Hydra 轨道 系列

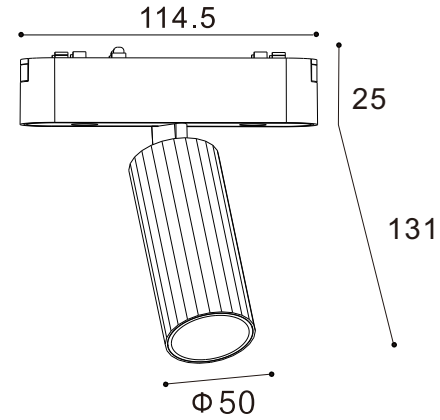

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-HD-12W	12W	Ra90	40-48V	860lm	Φ50x156x114.5	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle

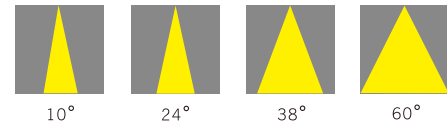


Notes:

*For other options special request, please contact us.
 For the most updated product information, please go to our website.




UT25-Pista

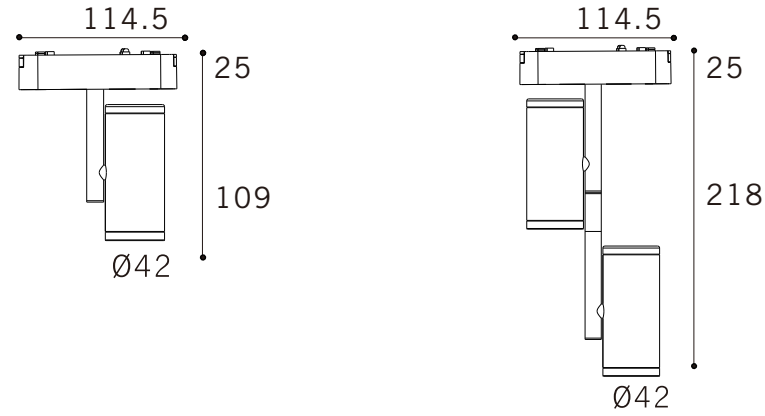

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-PST-8W	8W	Ra90	40-48V	640lm	Φ42x134x114.5	■ BK	3000K	No Dim,
UT25-PSTB-8W*2	8W*2	Ra90	40-48V	640lm*2	Φ42x243x114.5	□ WH	3500K 4000K 5000K 2700-6000K	Bluetooth, Zigbee,

Beam angle


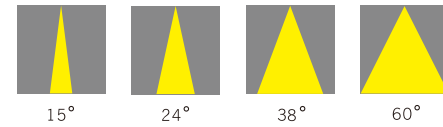


Notes:

*For other options special request, please contact us.
For the most updated product information, please go to our website.




UT25-Marlboro

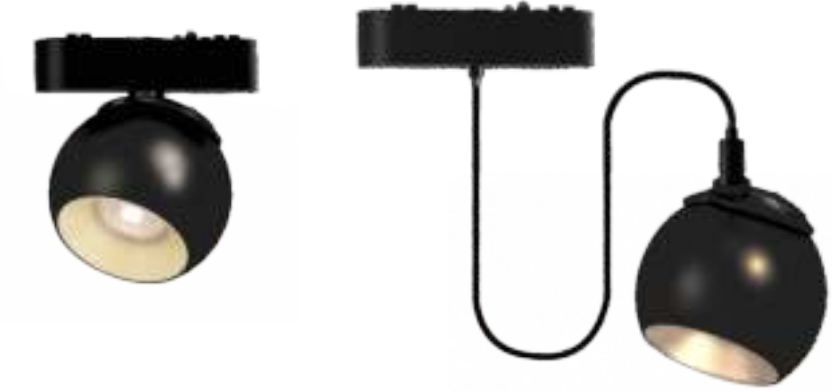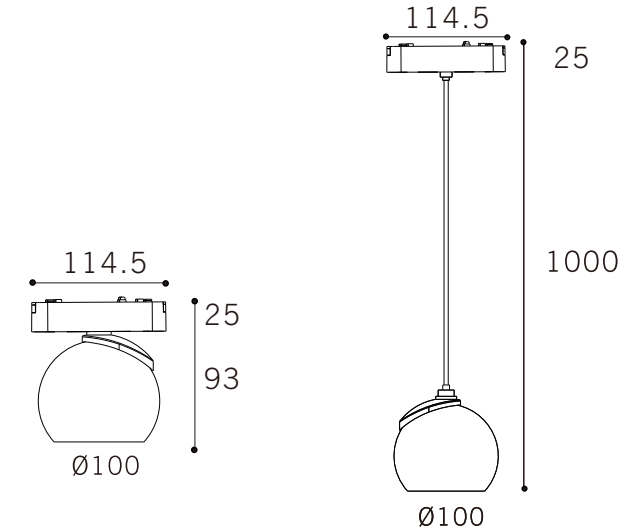

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-MBO-A	12W	Ra90	40-48V	860lm	Φ100x118x114.5	■ BK	3000K	No Dim,
UT25-MBO-B	12W	Ra90	40-48V	860lm	Φ100x1025x114.5	□ WH	3500K 4000K 5000K 2700-6000K	Bluetooth, Zigbee,

Beam angle




Notes:

*For other options special request, please contact us.
For the most updated product information, please go to our website.




UT25-Spider

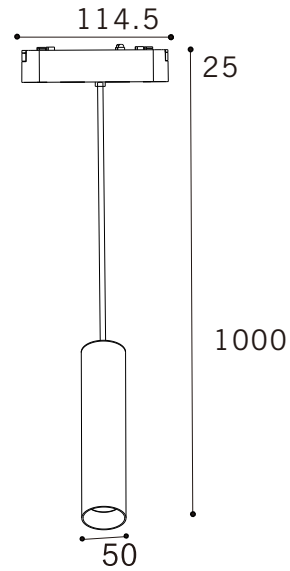

Product Code	Watt	>CRI	Voltage	LUMEN	Product Size	Finish	CCT	System Options
UT25-FM-9W	9W	Ra90	40-48V	720lm	Φ 50x500x147	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH	3000K 3500K 4000K 5000K 2700-6000K	No Dim, Bluetooth, Zigbee,

Beam angle



Notes:



*For other options special request, please contact us.
 For the most updated product information, please go to our website.



UT25





Product Code	Product Size	Rotation angle	Finish
UT25-AGR6	114.5x47.6x25	0-90°	■ BK □ WH

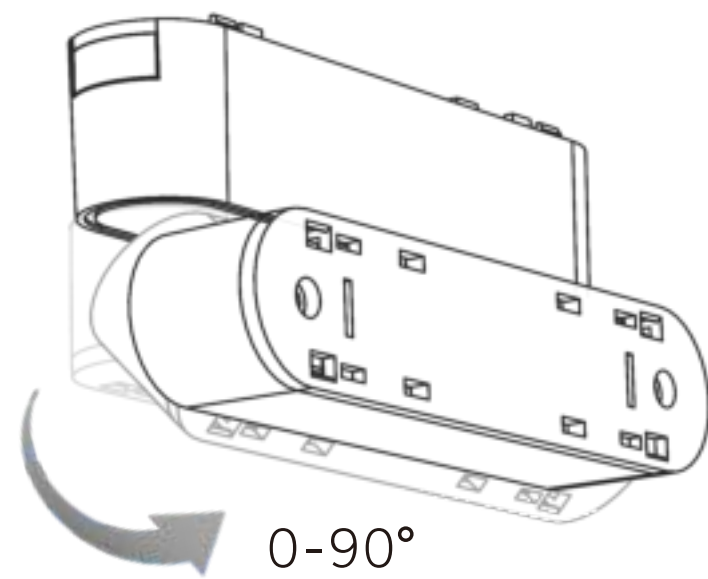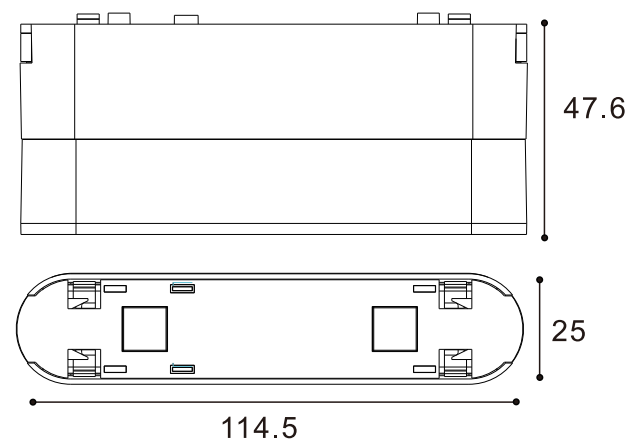

UT25



Product Code	Product Size	Rotation angle	Finish
UT25-AGR12	222x47.6x25	0-90°	<input checked="" type="checkbox"/> BK <input type="checkbox"/> WH

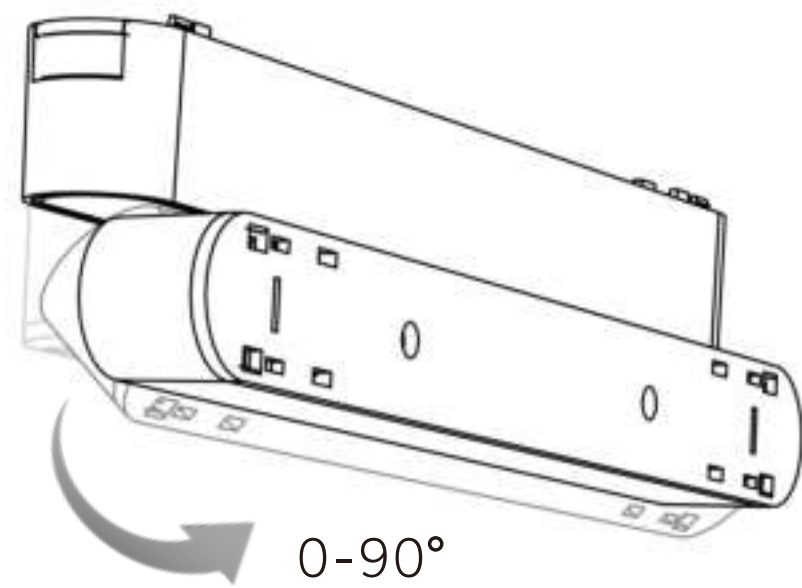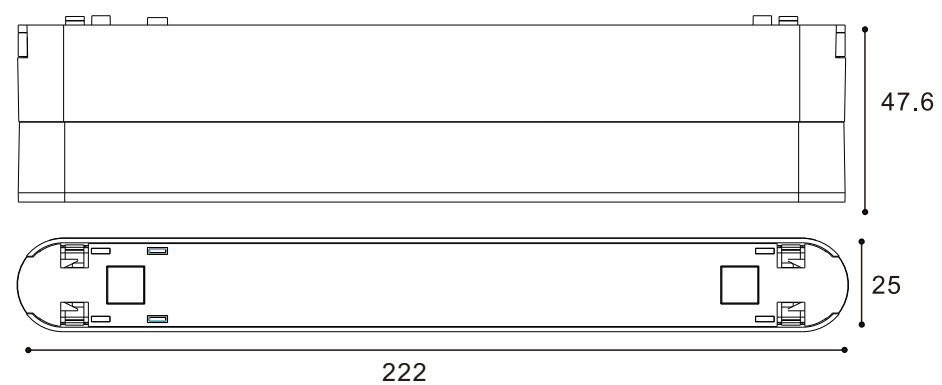




The click in and press button installation way, without tools or additional manual operations the lighting fixtures installation remains easy and immediate as if magnets were there.





UT25

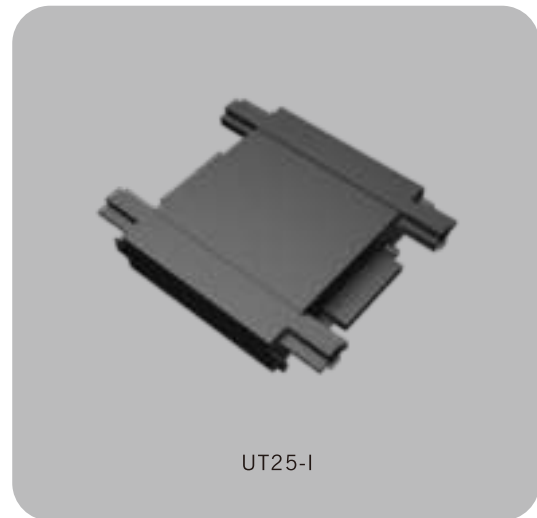


Ut25




CONNETION MODULE



Corner Connector

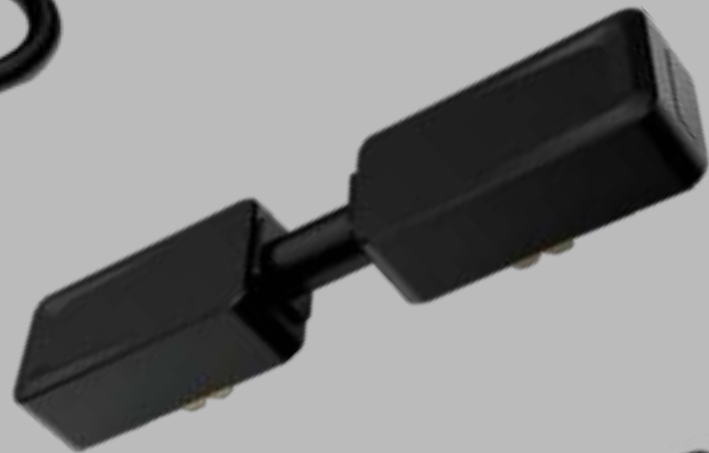

Straight Connector

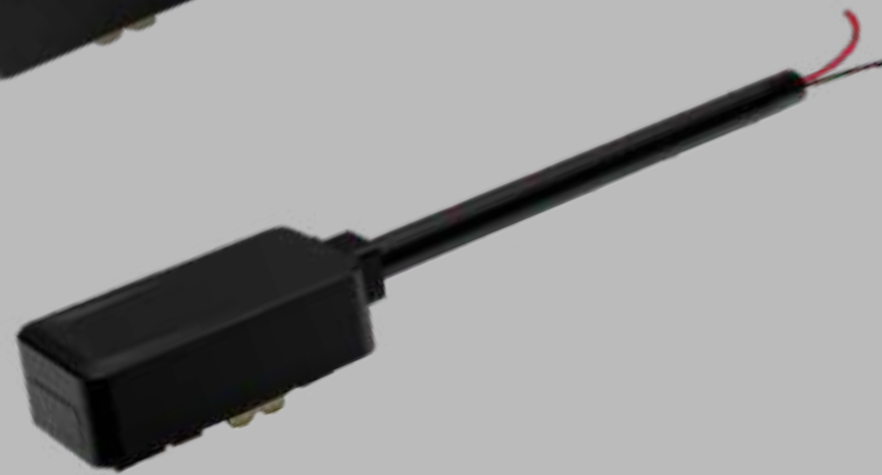

Live end

48V POWER SUPPLY

Product Code

Watt

Finish

Warranties

100/200W

■ BK

2 years

100/200W

□ WH

2 years

